



## SPOTLIGHT ON 55 YEARS OF SERVICE AND INNOVATION



### **REWINDA** Hose, Barrier & Cable Reels

When quality, performance & durability are priorities, Alemlube's Rewinda Series of hose, barrier and cable reels are the perfect choice for your industrial quality, polypropylene covered hose reel needs.

Researched and designed in conjunction with our long-standing industry leading partner, the Rewinda Series provides innovative, safe, ergonomic, aesthetically pleasing and functional long lasting hose storage and retrieval solutions. Replacing the S Series as released in 2008, the Rewinda Series' versatile line up covers the vast majority of applications with 20m compressed air reels, 15m hot wash reels, 15m high-pressure water reels, four welding reels & a 15m chemical, herbicide and pesticide reel, plus two 30m barrier reels and two handy cable reels all a part of the one product family.

Confirming our confidence in the product, the Rewinda Series of hose, cable and barrier reels are covered by a 10-year warranty on materials and workmanship and a 2-year warranty on wearing components such as O-rings, seals, hose assemblies, springs and bushes.

- The speed rewind control system on all models ensures that the hose retracts at a safe & steady speed.
- The stop-at-any-point latching mechanism secures the hose at the desired length every time.
- Sliding guide system ensures that the hose returns neatly & evenly onto the barrel assembly.
- Gen3 hybrid polymer hose and hose bend restrictor ensure a long service life
- Next level UV stabilised covers won't fade over time

NEW

| Model Number | Product and Description                                     | Price    |
|--------------|---|----------|
| AR1220CAR    | Rewinda Compressed Air Hose Reel 20m x 12mm ID - Red Cover  | \$403.00 |
| AR1220CAB    | Rewinda Compressed Air Hose Reel 20m x 12mm ID - Blue Cover | \$403.00 |
| AR1020CAR    | Rewinda Compressed Air Hose Reel 20m x 10mm ID - Red Cover  | \$392.00 |
| AR1020CAB    | Rewinda Compressed Air Hose Reel 20m x 10mm ID - Blue Cover | \$392.00 |
| AR1524020CRR | Rewinda Cable Reel 15 AMPS, 20m                             | \$544.00 |
| AR1024020CRR | Rewinda Cable Reel 10 AMPS, 20m                             | \$441.00 |





## SPOTLIGHT ON 55 YEARS OF SERVICE AND INNOVATION



- AR1220CAB**  
**REWINDA**  
**COMPRESSED AIR HOSE REEL**  
- 20M X 12MM ID
- Suitable for use in mine sites, automotive, transport, manufacturing, agricultural and civil contractor workshops
  - Gen3 Hybrid polymer hose
  - 20m x 12mm ID hose and 0.9m lead in hose
  - 1/2" BSP(T) inlet/outlet connections
  - 1/2" BSP(T) hose reel inlet thread
  - Maximum working pressure of 300psi
  - Working temperature of -40°C to +80°C
  - Weight of 14kg

\$403.00



- AR6150AR**  
**REWINDA**  
**OXY ACETYLENE TWIN HOSE REEL**  
- 15M X 6MM ID
- Designed exclusively for using with Oxy Acetylene, this fully serviceable reel complies with increasing WHS requirements
  - 15m x 6mm ID hose and 0.9m lead in hose
  - 5/8" UNF left & right connections
  - 5/8" UNF(m) left & right hose reel inlet thread
  - Maximum working pressure of 300psi
  - Working temperature of -20°C to +60°C
  - Weight of 16kg

\$667.00



- AR620AR**  
**REWINDA**  
**ARGON WELDING GAS HOSE REEL**  
- 20M X 6MM ID
- Industrial quality welding reel
  - Durable EPDM synthetic rubber hose
  - 20m x 6mm ID hose and 0.9m lead in hose
  - 5/8" UNF right connection
  - 5/8" UNF(m) hose reel inlet thread
  - Maximum working pressure of 300psi
  - Working temperature of -20°C to +60°C
  - Weight of 13kg

\$463.00



- AR6150PR**  
**REWINDA**  
**OXY PROPANE TWIN HOSE REEL**  
- 15M X 6MM ID
- Designed exclusively for using with Oxy Propane, this fully serviceable reel complies with increasing WHS requirements
  - 15m x 6mm ID hose and 0.9m lead in hose
  - 5/8" UNF left & right connections
  - 5/8" UNF(m) left & right hose reel inlet thread
  - Maximum working pressure of 300psi
  - Working temperature of -20°C to +60°C
  - Weight of 16kg

\$685.00



- AR620PR**  
**REWINDA**  
**OXY PROPANE HOSE REEL**  
- 20M X 6MM ID
- Designed exclusively for using with Oxy Propane, this fully serviceable reel complies with increasing WHS requirements
  - 20m x 6mm ID hose and 0.9m lead in hose
  - 5/8" UNF left connection
  - 5/8" UNF(m) hose reel inlet thread
  - Maximum working pressure of 300psi
  - Working temperature of -20°C to +60°C
  - Weight of 13kg

\$512.00

## HOSE, BARRIER & CABLE REELS



- AR30CBRY**  
**REWINDA**  
**CAUTION SAFETY BARRIER REEL**
- Provides a temporary barrier to clearly identify dangerous areas in the workplace or public spaces
  - Supplied with 30m x 48mm of yellow/black band with fixed-handle
  - Detachable steel mounting bracket enables 180° hose reel rotation
  - The accessory package includes a magnet, screw eye & expansion tube assists in barrier reel set up

AR30DBRR as above but to signify danger

\$366.00  
\$336.00



- AR615GB**  
**REWINDA**  
**GREASE HOSE REEL - 15M X 6MM ID**
- Suitable for industries including agriculture, automotive, manufacturing, mining, construction, transport and food & beverage sectors
  - High pressure R2 braid hose
  - 15m x 6mm ID hose and 0.9m lead in hose
  - 1/4" BSP(T) inlet and outlet connections
  - 1/4" BSP(T) hose reel inlet thread
  - Maximum working pressure of 5,800psi
  - Working temperature of -40°C to +100°C
  - Weight of 16kg

\$612.00



- AR1217HWR**  
**REWINDA**  
**HOT WATER WASHDOWN HOSE REEL**  
- 17M X 12MM ID
- Spray nozzle with a locking pin suitable for any type of hot water spray gun application
  - Durable synthetic rubber hose for hot water
  - 17m x 12mm ID hose and 0.9m lead in hose
  - 3/4" BSP(T) inlet and 1/2" BSP(T) outlet connections
  - 1/2" BSP(T) hose reel inlet thread
  - Maximum working pressure of 300psi
  - Working temperature of -20°C to +100°C
  - Weight of 17kg

\$562.00



- AR1020HPWR**  
**REWINDA**  
**HIGH PRESSURE HOT WATER WASHDOWN HOSE REEL**  
- 20M X 10MM ID
- Suitable for hot water washdown applications requiring high pressure
  - Wire braid hose
  - 20m x 10mm ID hose and 0.9m lead in hose
  - 3/8" BSP(m) inlet and 3/8" BSP(T) outlet connections
  - 3/8" BSP(T) hose reel inlet thread
  - Maximum working pressure of 3,000psi
  - Working temperature of -40°C to +120°C
  - Weight of 21kg

\$703.00



- AR1020WPR**  
**REWINDA**  
**WEEDICIDE, CHEMICAL & PESTICIDE HOSE REEL**  
- 20M X 10MM ID
- Offering safe chemical management in environments where chemicals are widely used
  - High quality PVC hose designed for use with acids & chemicals
  - 20m x 10mm ID hose and 0.9m lead in hose
  - 3/8" BSP(T) inlet and 1/4" BSP(T) outlet connections
  - 1/2" BSP(T) hose reel inlet thread
  - 3/8" BSP(T) hose reel inlet thread
  - Maximum working pressure of 300psi
  - Working temperature of 0°C to +60°C
  - Weight of 12kg

\$688.00



- AR1215OB**  
**REWINDA**  
**OIL HOSE REEL - 15M X 12MM ID**
- Suitable for industries including agriculture, automotive, manufacturing, mining, construction and transport and food & beverage sectors
  - High pressure wire braid hose
  - 15m x 12mm ID hose and 0.9m lead in hose
  - 1/2" BSP(T) inlet and 1/2" BSP(T) outlet connections
  - 1/2" BSP(T) hose reel inlet thread
  - Maximum working pressure of 2,320psi
  - Working temperature of -40°C to +100°C
  - Weight of 17kg

\$610.00





NEW

2  
YEAR  
WARRANTY**AD12AT**  
DINGO SERIES  
1/2" AIR OPERATED  
DIAPHRAGM PUMP

- Suitable for the transfer of oil, diesel, waste oil, ATF, coolant, antifreeze, petrol, wastewater, industrial sludge & some compatible chemicals
- Flow rates of up to 57 L/min
- Max operating pressure: 100psi (6.9 bar)
- Maximum delivery per cycle: 150ml
- Air Inlet: 1/4" BSPF
- Fluid Inlet / Outlet: 1/2" BSPF
- Max suspended solids diameter: 2.5mm

\$1,110.00

NEW

2  
YEAR  
WARRANTY**AD20AT**  
DINGO SERIES  
3/4" AIR OPERATED  
DIAPHRAGM PUMP

- Suitable for the transfer of oil, diesel, waste oil, ATF, coolant, antifreeze, petrol, wastewater, industrial sludge & some compatible chemicals
- Flow rates of up to 61 L/min
- Max operating pressure: 100psi (6.9 bar)
- Maximum delivery per cycle: 150ml
- Air Inlet: 1/4" BSPF
- Fluid Inlet / Outlet: 3/4" BSPF
- Max suspended solids diameter: 2.5mm

\$1,260.00

NEW

2  
YEAR  
WARRANTY**AD25AT**  
DINGO SERIES  
1" AIR OPERATED  
DIAPHRAGM PUMP

- Suitable for the transfer of oil, diesel, waste oil, ATF, coolant, antifreeze, petrol, wastewater, industrial sludge & some compatible chemicals
- Flow rates of up to 159 L/min
- Max operating pressure: 120psi (8 bar)
- Maximum delivery per cycle: 570ml
- Air Inlet: 1/2" BSPF
- Fluid Inlet / Outlet: 1" BSPF
- Max suspended solids diameter: 3.2mm

\$1,840.00

NEW

2  
YEAR  
WARRANTY**AD40AT**  
DINGO SERIES  
1-1/2" AIR OPERATED  
DIAPHRAGM PUMP

- Suitable for the transfer of oil, diesel, waste oil, ATF, coolant, antifreeze, petrol, wastewater, industrial sludge & some compatible chemicals
- Flow rates of up to 378 L/min
- Max operating pressure: 120psi (8 bar)
- Maximum delivery per cycle: 1.9L
- Air Inlet: 1/2" BSPF
- Fluid Inlet / Outlet: 1-1/2" BSPF
- Max suspended solids diameter: 4.8mm

\$2,440.00

NEW

2  
YEAR  
WARRANTY**AD50AT**  
DINGO SERIES  
2" AIR OPERATED  
DIAPHRAGM PUMP

- Suitable for the transfer of oil, diesel, waste oil, ATF, coolant, antifreeze, petrol, wastewater, industrial sludge & some compatible chemicals
- Flow rates of up to 568 L/min
- Max operating pressure: 120psi (8 bar)
- Maximum delivery per cycle: 3.9 litres
- Air Inlet: 1/2" BSPF
- Fluid Inlet / Outlet: 2" BSPF
- Max suspended solids diameter: 6.3mm

\$3,050.00

## SPOTLIGHT ON 55 YEARS OF SERVICE AND INNOVATION



## AIR OPERATED DIAPHRAGM PUMPS

NEW

1  
YEAR  
WARRANTY**DP71015**  
EL SERIES  
1/2" AIR OPERATED  
DIAPHRAGM PUMP

- For transferring & dispensing AdBlue®, oil, diesel, waste oil, ATF, coolant, antifreeze, petrol, wastewater, industrial sludge & some compatible chemicals
- Flow rates of up to 49L/min
- Max operating pressure: 100psi (6.9 bar)
- Maximum delivery per cycle: 150ml
- Air Inlet: 1/4" BSPF
- Fluid Inlet / Outlet: 1/2" BSPF
- Max suspended solids diameter: 2.4mm

\$890.00

NEW

1  
YEAR  
WARRANTY**DP71020**  
EL SERIES  
3/4" AIR OPERATED  
DIAPHRAGM PUMP

- For transferring & dispensing oil, diesel, waste oil, ATF, coolant, antifreeze, petrol, wastewater, industrial sludge & some compatible chemicals
- Flow rates of up to 57L/min
- Max operating pressure: 120psi (8.3 bar)
- Maximum delivery per cycle: 150ml
- Air Inlet: 1/4" BSPF
- Fluid Inlet / Outlet: 3/4" BSPF
- Max suspended solids diameter: 2.4mm

\$1,010.00

NEW

1  
YEAR  
WARRANTY**DP71025**  
EL SERIES  
1" AIR OPERATED  
DIAPHRAGM PUMP

- For transferring & dispensing oil, diesel, waste oil, ATF, coolant, antifreeze, petrol, wastewater, industrial sludge & some compatible chemicals
- Flow rates of up to 133L/min
- Max operating pressure: 120psi (8.3 bar)
- Maximum delivery per cycle: 600ml
- Air Inlet: 1/4" BSPF
- Fluid Inlet / Outlet: 1" BSPF
- Max suspended solids diameter: 3.2mm

\$1,470.00

NEW

1  
YEAR  
WARRANTY**DP71040**  
EL SERIES  
1-1/2" AIR OPERATED  
DIAPHRAGM PUMP

- For transferring & dispensing oil, diesel, waste oil, ATF, coolant, antifreeze, petrol, wastewater, industrial sludge & some compatible chemicals
- Flow rates of up to 340L/min
- Max operating pressure: 120psi (8.3 bar)
- Maximum delivery per cycle: 2.4 litres
- Air Inlet: 1/2" BSPF
- Fluid Inlet / Outlet: 1-1/2" BSPF
- Max suspended solids diameter: 6.4mm

\$1,960.00

NEW

1  
YEAR  
WARRANTY**DP71050**  
EL SERIES  
2" AIR OPERATED  
DIAPHRAGM PUMP

- For transferring & dispensing oil, diesel, waste oil, ATF, coolant, antifreeze, petrol, wastewater, industrial sludge & some compatible chemicals
- Flow rates of up to 651L/min
- Max operating pressure: 120psi (8.3 bar)
- Maximum delivery per cycle: 5.3 litres
- Air Inlet: 1/2" BSPF
- Fluid Inlet / Outlet: 2" BSPF
- Max suspended solids diameter: 6.4mm

\$2,440.00

NEW

1  
YEAR  
WARRANTY**DP71080**  
EL SERIES  
3" AIR OPERATED  
DIAPHRAGM PUMP

- For transferring & dispensing oil, diesel, waste oil, ATF, coolant, antifreeze, petrol, wastewater, industrial sludge & some compatible chemicals
- Flow rates of up to 897L/min
- Max operating pressure: 120psi (8.3 bar)
- Maximum delivery per cycle: 10.03 litres
- Air Inlet: 3/4" BSPF
- Fluid Inlet / Outlet: 3" BSPF
- Max suspended solids diameter: 9.5mm

\$9,360.00



2 YEAR WARRANTY

Italian Pumps

15 YEAR WARRANTY

Australian Tanks

**L10040PA**  
**ALEMLUBE**  
**100L LOCKABLE & PORTABLE**  
**STORAGE & TRANSFER DIESEL**  
**FUEL POD**

- Australian made, heavy duty, robustly constructed polyethylene tank
- Dispensing kit consists of a 12V pump, 4m long antistatic fuel delivery hose, 2m battery cables and auto shut off nozzle
- Delivery rates of up to 50L/min
- Recesses for tie down straps on the tank aid handling

\$1,230.00

\$1,440.00

L10040PAM as above but includes a meter

2 YEAR WARRANTY

Italian Pumps

15 YEAR WARRANTY

Australian Tanks

**L20040PA**  
**ALEMLUBE**  
**200L LOCKABLE & PORTABLE**  
**STORAGE & TRANSFER DIESEL**  
**FUEL POD**

- Australian made, heavy duty, robustly constructed polyethylene tank
- Dispensing kit consists of a 12V pump, 4m long antistatic fuel delivery hose, 2m battery cables and auto shut off nozzle
- Delivery rates of up to 50L/min
- Forklift lifting point capability

\$1,320.00

\$1,530.00

L20040PAM as above but includes a meter

2 YEAR WARRANTY

Italian Pumps

15 YEAR WARRANTY

Australian Tanks

**L45040PA**  
**ALEMLUBE**  
**450L LOCKABLE & PORTABLE**  
**STORAGE & TRANSFER DIESEL**  
**FUEL POD**

- Australian made, heavy duty, robustly constructed polyethylene tank
- Dispensing kit consists of a 12V pump, 4m long antistatic fuel delivery hose, 2m battery cables and auto shut off nozzle
- Delivery rates of up to 50L/min
- Recesses for tie down straps on the tank aid handling

\$1,000.00

\$2,010.00

L45040PAM as above but includes a meter

2 YEAR WARRANTY

Italian Pumps

15 YEAR WARRANTY

Australian Tanks

**L60040PA**  
**ALEMLUBE**  
**600L LOCKABLE & PORTABLE**  
**STORAGE & TRANSFER DIESEL**  
**FUEL POD**

- Australian made, heavy duty, robustly constructed polyethylene tank
- Dispensing kit consists of a 12V pump, 4m long antistatic fuel delivery hose, 2m battery cables and auto shut off nozzle
- Delivery rates of up to 50L/min
- Forklift lifting point capability

\$1,960.00

\$2,170.00

L60040PAM as above but includes a meter

2 YEAR WARRANTY

Italian Pumps

15 YEAR WARRANTY

Australian Tanks

**L80040PA**  
**ALEMLUBE**  
**800L LOCKABLE & PORTABLE**  
**STORAGE & TRANSFER DIESEL**  
**FUEL POD**

- Australian made, heavy duty, robustly constructed polyethylene tank
- Dispensing kit consists of a 12V pump, 4m long antistatic fuel delivery hose, 2m battery cables and auto shut off nozzle
- Delivery rates of up to 50L/min
- Recesses for tie down straps on the tank aid handling

\$2,970.00

\$3,520.00

L100040PA as above but with 1,000L tank \$3,153.00  
L120040PA as above but with 1,200L tank \$3,520.00

SPOTLIGHT ON 55 YEARS OF SERVICE AND INNOVATION

REFUELLING STORAGE, TRANSFER & METERING

2 YEAR WARRANTY

Italian Pumps

15 YEAR WARRANTY

Australian Tanks

**501A**  
**ALEMLUBE**  
**ROTARY ACTION DRUM PUMP**

- Suitable for the transfer of diesel, petrols, kerosene, fuel oil & machine oil
- 2" BSP bung adaptor
- Delivery rates of up to 18L/min or 0.26L per rotation
- Length: 1,300mm
- Delivery tube: 31.8mm (1 1/4") OD
- Hose: 19.05mm (3/4") ID x 2.2m
- Includes 2.2m of an antistatic hose, bung adaptor, rubber gasket, a four chamber rotor assembly, spout & spout holster
- Weight: 3.6 kg

\$186.70

2 YEAR WARRANTY

Italian Pumps

15 YEAR WARRANTY

Australian Tanks

**52004-3AC**  
**ALEMLUBE**  
**12V HIGH FLOW DIESEL**  
**TRANSFER PUMP**

- Powerful bi-pump designed for use with both diesel dispensers and fixed fuel transfer systems.
- Flow rates of up to 85L/min
- 1" BSP(f) flanged connections
- Compact sturdy structure
- Heavy duty reliability
- Duty cycle of 30 mins on / 30 mins off
- Weight: 10kg

\$1,020.00

\$1,020.00

52005-3AC as above but 24V

2 YEAR WARRANTY

Italian Pumps

15 YEAR WARRANTY

Australian Tanks

**52000**  
**ALEMLUBE**  
**12V DIESEL REFUELLING**  
**TANK KIT**

- Capable of flow rates of up to 50L/min
- Includes 4m of antistatic fuel delivery hose, 2m of battery cable, a stainless steel & brass fuel filler and a manual nozzle
- Maximum head capacity of 15m
- Self priming vane pump includes a built-in bypass
- Duty cycle of 30 minutes on, 30 minutes off
- Suction capacity of up to 2m

\$590.00

\$760.00

52000A as above but with auto shut-off nozzle

2 YEAR WARRANTY

Italian Pumps

15 YEAR WARRANTY

Australian Tanks

**52040**  
**ALEMLUBE**  
**12V SELF PRIMING DIESEL FUEL**  
**TRANSFER PUMP**

- Flow rates of up to 50 L/min
- Self-priming 12V electric pump with on/off switch
- Sturdy handle for convenient portability
- Duty cycle of 30 mins. on / 30 mins. off
- Maximum working pressure of 22psi (1.5 bar)
- 3/4" BSP inlet & outlet connections
- Power: 300 Watts & 2,900 RPM

\$517.00

\$517.00

52050 as above but in-line diesel

2 YEAR WARRANTY

Italian Pumps

15 YEAR WARRANTY

Australian Tanks

**5080AN**  
**ALEMLUBE**  
**HI-FLOW REFUELLING DRUM**  
**PUMP WITH FILTER**

- Low torque, high volume pump is easy to use and delivers up to 110L/min
- Facilitates best in class delivery rates of 1.1 litres per rotation
- Lockable handle minimises the possibility of unauthorised fuel transfer
- PPFR covered handle grip reduces operator fatigue
- Complete with 10 micron 1" FA2 fuel filter

\$764.00

\$474.00

5080AN as above but without filter

2 YEAR WARRANTY

Italian Pumps

15 YEAR WARRANTY

Australian Tanks

**52004A**  
**ALEMLUBE**  
**12V HIGH VOLUME DIESEL DRUM**  
**PUMP WITH AUTO SHUT-OFF NOZZLE**

- 1" BSP(f) inlet/outlet
- Flow rates of up to 85L/min
- Motor protection fuse prevents motor overload
- Telescopic down tube suits fuel tanks up to 1,000mm deep
- Includes an automatic shut off nozzle
- Self priming vane pump with sintered steel rotor and acetyl resin vanes
- Total maximum discharge lift capacity of 10m
- Suitable for diesel fuel transfer only

\$1,650.00

\$1,360.00

52004 as above but with on/off nozzle





## SPOTLIGHT ON 55 YEARS OF SERVICE AND INNOVATION



**SC60090**  
**EL SERIES**  
**4 DRUM SPILL CONTAINER**

- Complete with sump plug for draining
- High strength polyethylene
- High visibility yellow pallet with black grate
- Easily moved by forklift
- Removable platform for cleaning
- Nestable design for easy & efficient storage
- Dimensions & weight:  
1,300mm x 1,300mm x 300mm / 36kg
- Helps create a WH&S compliant workplace
- Spill containment capacity of 250L

**\$780.00**



**SC60050**  
**EL SERIES**  
**DOUBLE IBC SPILL CONTAINER**

- Complete with sump plug for draining
- High strength polyethylene
- High visibility yellow pallet with black grate
- Easily moved by forklift
- Removable platform for cleaning
- Nestable design for easy & efficient storage
- Dimensions & weight:  
2,200mm x 1,300mm x 500mm / 100kg
- Spill containment capacity of 1,800L
- Helps create a WH&S compliant workplace

**\$3,850.00**

Also available:  
**SC60050WC**  
Double IBC Protection Cover  
**\$660.00**



**SC60040**  
**EL SERIES**  
**SINGLE IBC SPILL CONTAINER**

- Complete with sump plug for draining
- High strength polyethylene
- High visibility yellow pallet with black grate
- Easily moved by forklift
- Removable platform for cleaning
- Nestable design for easy & efficient storage
- Dimensions & weight:  
1,380mm x 1,380mm x 900mm / 71kg
- Spill containment capacity of 1,300L
- Helps create a WH&S compliant workplace

**\$2,390.00**

Also available:  
**SC60040WC**  
Single IBC Protection Cover  
**\$440.00**



**SC60080**  
**EL SERIES**  
**2 DRUM SPILL CONTAINER**

- Complete with sump plug for draining
- High strength polyethylene
- High visibility yellow pallet with black grate
- Easily moved by forklift
- Removable platform for cleaning
- Nestable design for easy & efficient storage
- Dimensions & weight:  
1,300mm x 700mm x 450mm / 25kg
- Spill containment capacity of 220L
- Helps create a WH&S compliant workplace

**\$690.00**



**SJ-200-010**  
**EL SERIES**  
**4 DRUM RACK SPILL CONTAINER**

- Compatible with standard 205L drums
- Ideal for storage & dispensing from up to 4 drums
- Manufactured from 100% recyclable polyethylene
- Spill containment capacity of 450L
- UV and weather resistant
- Tested for weight and hydrostatic loads
- Dimensions & weight:  
940mm x 1,375mm x 390mm / 61kg

**\$2,050.00**

## SPILL CONTAINMENT & REFUELLING



**51039**  
**ALEMLUBE**  
**AUTO SHUT OFF DIESEL NOZZLE**

- Delivery rates of up to 120L/min
- Automatically cuts off when a diesel tank is full
- Suitable for applications involving an electric diesel transfer pump only
- 1" BSP(f) inlet swivel
- Body: aluminium
- Seals: buna-n & viton
- Outlet spout: aluminium with viton cased oil seal
- Maximum working pressure of 80psi (5.5 bar) (not suitable for gravity feed applications)
- Weight 1.6kg

**\$370.00**



**51039M**  
**ALEMLUBE**  
**AUTO SHUT OFF METERED DIESEL FUEL NOZZLE**

- Digital meter with resettable 5-digit batch total
- Digital meter with non-resettable 7-digit cumulative total
- Flow rates of up to 120L/min
- Working pressure of 5psi (0.35 bar) to 50psi (3.5 bar)
- Operating temperature range of -25°C to +55°C
- 1" BSP(f) inlet swivel
- Ergonomic and lightweight at 1.3kg

**\$540.00**



**212000**  
**PIUSI**  
**12V DIESEL REFUELLING SYSTEM**

- Versatile, compact & easy to install pump, reel, filler and auto shut off nozzle kit simplifies diesel fuel transfer
- Integrated dual 12V pumps deliver up to 45L/min
- Pump duty cycle of 30 mins on, 30 mins off
- 30 micron filter with replaceable cartridge ensures contaminate free diesel fuel delivery
- Suitable for mobile or fixed tanks
- Sturdy metal construction with side safety guards ensures a long working life

**\$3,600.00**



**HR90080C**  
**EL SERIES**  
**3/4" DIESEL FUEL HOSE REEL WITH AUTO SHUT OFF NOZZLE**

- Reinforced steel mounting frame provides maximum strength & stability
- Includes 10m x 19mm ID NBR rubber hose, hose stop and auto shut-off nozzle
- 1.5mm thick robust drum assembly with stiffening ribs & flange edges
- Black non corrosive plastic cover ensures operator safety
- New innovative latching solution enables the hose to be stoppped in multiple positions as required

**\$913.00**



**51040**  
**ALEMLUBE**  
**1" HIGH FLOW AUTO SHUT OFF DIESEL NOZZLE**

- High speed, reliable & robust automatic nozzle
- Maximum flow rate of 140L/min
- Designed to operate with pumping systems only
- Maximum working pressure of 40psi (2.8 bar)
- 1" BSP(f) hot stamped brass inlet swivel
- 3-speed lever with removable latch pin
- 3-position stay open latch
- Suitable for dispensing diesel fuel & biodiesel up to B5

**\$400.00**



**52007**  
**ALEMLUBE**  
**MANUAL SHUT-OFF DIESEL NOZZLE**

- Capable of flow rates up to 150L/min
- Ideal for farm tank applications
- Suitable for gravity feed applications & applications with pressures of up to 140psi (10bar)
- Hanging clip helps to reduce the possibility of diesel fuel contamination and nozzle damage
- 1" BSP(f) inlet swivel

**\$68.40**



#### Q30050 EL SERIES OIL TRANSFER KIT WITH METER

- Flow rates of up to 10L/min
- Includes a 3:1 ratio oil pump, 1/2" 4m hydraulic hose, electronic oil meter and adjustable 2" bung adaptor
- Suits 205L drums and transfers engine, gear hydraulic oils up to SAE130 and ATF
- Air consumption of 3.6 cfm at 150psi
- Double acting pump with a differential air motor ensures smooth and constant oil delivery
- Max operating pressure of 450psi (30bar)
- Smart design with fewer parts

\$966.00

#### O30060 EL SERIES MOBILE OIL TRANSFER KIT

- Transfer kit flow rates of up to 10L/min
- Maximum operating pressure of 450psi (30bar)
- High mobility kit complete with 3:1 ratio oil pump, 1/2" ID 4m hydraulic hose, electronic oil meter, 2" bung adaptor to suit 205L drums & robust trolley
- Air inlet pressure from 30psi to 150psi
- Max oil viscosity of SAE130
- Pump noise level of 82 dB
- Your cost effective oil delivery and metering solution

\$1,800.00

#### 454637C ALEMLUBE IBC OIL STORAGE & TRANSFER KIT

- Unit includes a 1,000L IBC container, 3:1 ratio pump, hose reel inclusive of 10m of hose, a side mounting bracket and an electronic oil meter
- Environmentally friendly as costly and time consuming empty 205L drum disposal is no longer required
- 3:1 ratio pump facilitates flow rates of up to 18L/min
- Oil storage and dispensing of the future

454697 as above but without IBC

\$5,070.00  
\$4,495.00

#### O30070 EL SERIES MOBILE OIL TRANSFER KIT WITH HOSE REEL

- Suitable for use with engine, gear, hydraulic oils up to SAE130 and ATF
- Low air consumption of 180NL/min (6.4cfm)
- Complete with 15m x 1/2" ID S.A.E. 1001R1 wire braid hose
- High mobility kit complete with 3:1 ratio oil pump, oil hose reel with 15m x 1/2" ID hydraulic hose, electronic oil meter, 2" bung adaptor to suit 205L drum and robust heavy duty trolley
- Air pressure range from 20psi to 140psi
- Transfer kit flow rates of up to 8L/min

\$2,990.00

#### 454110N SAMOA 3:1 OIL TRANSFER KIT WITH METER

- 3:1 ratio pump, 3m x 1/2" ID hydraulic hose & electronic resettable meter
- Flow rates of up to 12L/min
- Air pressure range from 20psi to 140psi
- Air consumption 180NL/min (6.4 cfm)
- Air inlet: 1/4" BSP(f)
- Fluid outlet: 1/2" BSP(f)
- Noise level: 80dB
- Oil meter accurate to a 0.5% & easily replaceable AAA batteries

454111N as above but with on/off gun

\$1,699.00  
\$1,138.00

## SPOTLIGHT ON 55 YEARS OF SERVICE AND INNOVATION

## OIL STORAGE, TRANSFER & METERING

#### 8828N2 ALEMLUBE 20L OIL DRUM PUMP

- Capable of delivering up to 110mL per stroke
- Downtube extension and extra Riecke adaptor make the pump suitable for use with a variety of 20L drums available on the market
- Ideal pump for the transfer of engine, gear, diff and hydraulic oils in busy vehicle servicing workshops
- Drainback nozzle holster ensures that excess oil ends up back in the drum
- Incorporates a filter in the drain back holster to protect against foreign particle contamination

\$69.10

#### DH180240 ALEMLUBE 240V 180KG GREASE DRUM HEATER

- Reliable and built to last
- Suits 205L oil drums & 180kg grease drums
- Heats viscous fluids to a pourable temperature
- Max operating temperature of 218°C
- B200 type thermostat
- Surface grounded electrically with internal metal screen
- Dimensions of 1,740mm long x 125mm wide
- 1,400mm long power cord & 3-pin plug
- Also suitable for high viscosity oils

\$620.00  
DH180024 as above but 24V \$730.00

#### DH20240 ALEMLUBE 240V 20KG GREASE DRUM HEATER

- Reliable and built to last
- Heats high viscosity greases up to a pumpable temperature
- Maximum operating temperature of 150°C
- B200 type thermostat
- Surface grounded electrically with internal metal screen
- Dimensions of 890mm long x 125mm wide
- 1,400mm long power cord & 3-pin plug
- Also suitable for high viscosity oils

\$435.00  
DH20024 as above but 24V \$455.00

#### 535510 SAMOA 5:1 RATIO OIL TRANSFER 205L DRUM PUMP

- Air pressure operating range: 30 to 175 psi (2 to 12 bar)
- Double acting air operated 5:1 ratio oil transfer pump
- Handles synthetic/mineral engine oils, hydraulic oil, gear oil and ATF
- Air consumption: 350 NL/min (12.4 acfm)
- Max fluid outlet pressure: 875psi (60 bar)
- Flow rates of up to 30 L/min
- 3/8" BSP(f) air inlet
- 1-1/2" BSP(f) fluid inlet
- 1/2" BSP(f) fluid outlet

\$1,880.00

#### 536030 SAMOA 10:1 RATIO OIL TRANSFER TANK PUMP

- Double acting air operated 10:1 ratio transfer pump
- 4-1/2" (115mm) air motor
- Air pressure rating 20 to 174psi (1.4 to 12 bar)
- Air consumption: 850 NL/min (30 cfm)
- Max fluid outlet pressure: 1,740psi (120 bar)
- 1/2" BSP(f) air inlet
- 1-1/2" BSP(f) fluid inlet / 3/4" BSP(f) fluid outlet
- Flow rates of up to 65L/min

\$5,020.00

#### 6603A ALEMLUBE BRAKE CLEANER SPRAYER

- 1L capacity
- Robust construction and ergonomic design
- Resistant to oils, most hydrocarbons and solvents
- Wide filling opening reduces spills
- Strong translucent tank with level indicator
- Adjustable conical nozzle
- 2.5 bar safety valve with depressurisation option
- Wide application range in the automotive, construction, industrial and agriculture sectors
- Protective valve chamber sleeve

\$59.20





**41006N  
ALEMLUBE  
MANUAL WASTE OIL EXTRACTOR**

- 6.5L capacity
- Portable, lightweight and self-contained
- Extracts waste oil from motor vehicles, motor bikes, lawn mowers, marine engines, stationary engines and all-terrain vehicles
- Also suitable for salt water (bilge) and water applications
- Complete with 3 probes to suit various dipsticks & applications
- Automatically prevents fluid overflow or leakage from the tank
- Maximum operating temperature of 100°C

\$245.50



**30080  
ALEMLUBE  
MOBILE WASTE  
OIL DRAINER**

- Transfers and captures waste oil from crankcases, transmissions and differentials
- Drain bowl capacity of 20L
- Holding tank capacity of 80L
- Height adjustable waste oil reservoir
- Holding tank emptied with the aid of air pressure
- Equipped with a pneumatic safety relief valve calibrated at 14psi (1bar)

\$680.00



**42100  
ALEMLUBE  
COMMERCIAL VEHICLE  
MOBILE WASTE OIL DRAINER**

- Holding tank capacity of 100L
- Sturdy and durable construction
- 145mm high swivelling front rubber wheels facilitate accurate mobility
- Internal baffles reduce the possibility of waste oil spillage
- Ideal for busy truck and bus workshops
- 860mm handle length
- Dimensions of 1,098mm (L) x 805mm (W) x 240mm (D)

\$650.00



**42110  
ALEMLUBE  
COMMERCIAL VEHICLE PIT ROLLING  
WASTE OIL DRAINER**

- Holding tank capacity of 110L
- Range of slide rod handle of 90cm-131.5cm enables the unit to be used on pits of varying widths
- Dimensions of 800mm (L) x 700mm (W) x 245mm (H)
- Weight of 40kg

\$1,160.00



**372400  
SAMOA  
MOBILE WASTE  
OIL DRAINER**

- Premium quality and European engineering
- Drain bowl capacity of 20L
- Holding tank capacity of 100L
- Maximum working height of 2,000mm
- Unique specially molded tray can be used to hold bolts, filters and washers
- Waste fluids can be pressurised or pumped out of the 100L capacity holding tank

\$1,200.00

**SPOTLIGHT ON 55 YEARS OF SERVICE AND INNOVATION**


**WASTE OIL, STORAGE SOLUTIONS & WORKLIGHTS**



**20099  
ALEMLUBE  
RECHARGEABLE LED HEAD LAMP**

- Affordable, high-performance lighting
- Hands-free use with innovative motion on/off sensor technology
- High-power COB LED, up to 30 lumen in Normal mode, 100 lumen in ECO mode
- Reliable illumination with 2 hours in full power mode and 5.5 hours in ECO mode
- Fast charging 3.7V, 1500mAh Li-Po battery, ready to go in just 2.5 hours
- Withstands tough conditions with an IP65 and IK07 ratings
- Efficient operation in temperatures ranging from -10°C to +40°C

\$72.00

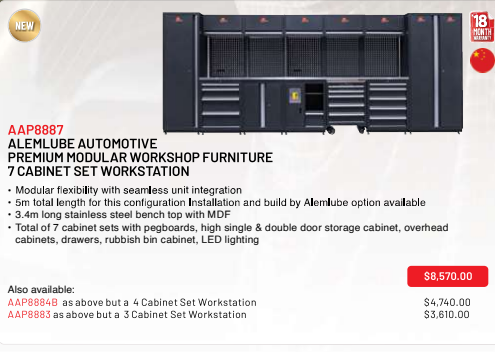

**AAP8887  
ALEMLUBE AUTOMOTIVE  
PREMIUM MODULAR WORKSHOP FURNITURE  
7 CABINET SET WORKSTATION**

- Modular flexibility with seamless unit integration
- 5m total length for this configuration Installation and build by Alemlube option available
- 3.4m long stainless steel bench top with MDF
- Total of 7 cabinet sets with pegboards, high single & double door storage cabinet, overhead cabinets, drawers, rubbish bin cabinet, LED lighting

Also available:  
AAP8884B as above but a 4 Cabinet Set Workstation  
AAP8883 as above but a 3 Cabinet Set Workstation

\$8,570.00

\$4,740.00

\$3,610.00



**20022  
ALEMLUBE  
WORKSHOP FLOOD LIGHT**

- Versatile lighting for demanding work environments
- Equipped with three illumination modes: 800 lumen (full power), 400 lumen (normal mode) and 120 lumen (eco mode)
- Reliable two hours operation in full power and up to 12 hours in ECO 3.5 mode
- Fast charging 3.7V, 2600mAh Li-ion battery, ready to go in 4.5 hours
- Withstands demanding industrial conditions with IP65 and IK07 protection ratings

\$85.00



**20044  
ALEMLUBE  
FOLDABLE LED SLIM  
& COMPACT WORK LIGHT**

- An essential tool for any workshop, industrial facility or home use
- Delivers three light options: 800 lumen (flood light), 400 lumen (work light) and 120 lumen (top light)
- Hands-free use with a 180° magnetic vertical swivel head
- Durable aluminium casing with IP54 and IK07 ratings
- Able to withstand tough and demanding workplace environments

\$89.00



**20066N2  
ALEMLUBE  
LED + UV  
INSPECTION LIGHT**

- Designed, developed & manufactured specifically for providing valuable assistance when undertaking close inspection work under & around vehicles and other applications requiring well-lit detailed inspection.
- Gas leak detection capabilities
- 4W COB LED, 4000lm on body
- 3W SMD LED, 100lm on top
- 80 CRI to illuminate true colours 6500K
- 3.7V 2200mAh Li-ion battery

\$85.00



## SPOTLIGHT ON 55 YEARS OF SERVICE AND INNOVATION



### 630A ALEMLUBE 450G 20V LITHIUM-ION CORDLESS GREASE GUN

- Backlit display provides real time battery level, grease level & grease dispensed operator feedback information
- Supplied with 2 x 2Ah batteries & compartmentalised protective plastic carry case
- Grease pressures up to 7,250psi (500bar)
- Adjustable delivery rates of 100g/min or 160g/min
- Able to dispense up to 16 cartridges before battery recharge is required

\$713.00



### G10040N EL SERIES 450G 18V LITHIUM-ION CORDLESS GREASE GUN

- Generates grease pressures of up to 10,000psi (690bar)
- Capable of delivering up to 80g/min
- Two Li-Ion batteries, 3,000 mAh & 1,500 mAh
- Recharge time of 75 minutes (1,500 mAh battery)
- Dispenses grease from up to 12 x 450g cartridges before changing over or recharging of the 3,000 mAh battery is required

\$575.00



### G10010N EL SERIES 450G TRIGGER ACTION GREASE GUN

- Grease pressures of up to 4,000psi (276bar)
- Delivery rates of up to 1.15g per stroke
- Robust die cast aluminium head assembly
- Heavy duty 4 jaw coupler
- Exceptional value for money for cost conscious customers

\$69.50



### 660AN ALEMLUBE 450G TRIGGER ACTION GREASE GUN

- Grease pressures of up to 8,500psi (586bar)
- Delivers up to 1.1g of grease per stroke
- Unique Twin-Lock System seals the piston and eliminates the possibility of dummy lubrication
- Coarse thread on barrel assembly eliminates cross threading during cartridge change over
- Ever-Flow System enables the gun to be used with thick tacky greases up to NLGI2
- Lightweight, durable and compact aluminium die cast head assembly
- High volume / high pressure option facilitates fast and efficient greasing

\$138.60



### 680AN ALEMLUBE 450G AIR OPERATED GREASE GUN

- Develops grease pressures of up to 3,290psi (226bar)
- Pressure ratio of 40:1
- Delivers up to 182g per minute
- Recommended maximum air pressure of up to 98psi (6bar)
- Suits 450g cartridge or bulk grease
- Continuous flow or single shot operation
- Suitable for use with grease up to NLGI2
- Flexible extension length of 50cm
- Weight of 1.4kg
- Manufactured in Germany

\$402.00

## GREASING EQUIPMENT



### 80100 ALEMLUBE 205L/180KG DRUM DOLLY

- Includes 4 x 75mm heavy duty castors
- Provides a convenient and easy means of moving 205L drums around a workshop, warehouse or production facility
- Industrial quality steel construction
- Reduces the physical effort of drum handling and provides a safer working environment
- Can convert an empty drum into a mobile container

\$146.60

80060 as above but 60L/55kg \$124.20  
80082 as above but 20L/20kg \$94.50



### 424170 SAMOA 20KG GREASE KIT WITH CARRY HANDLE

- Supplied complete with 4m of grease hose
- Robust, heavy duty construction for extreme conditions
- 55:1 ratio air motor develops grease pressures of up to 7,950psi (548bar)
- Delivers up to 0.9kg per minute
- 70mm diameter air motor with 35mm stroke
- Handles high density, tacky greases up to NLGI2

\$1,333.00

424150 as above but with trolley \$1,495.00



### 9979H ALEMLITE 180KG STATIONARY GREASE KIT

- 50:1 ratio
- Can service up to 3 reels
- Free delivery rates with NLGI2 at 25°C of 2.0kg/min
- 1/4" NPT(f) inlet
- 3/8" NPT(f) outlet

\$3,650.00

99780 as above but pump with dolly \$4,363.00



### 428262 SAMOA 180KG STATIONARY GREASE KIT

- 55:1 ratio grease pump develops up to 7,950psi (548bar)
- Integral filter eliminates the chance of pump tube contamination
- Lightweight ergonomic, cast alloy, grease control valve included
- Grease control valve has single shot or continuous flow option
- Ideal for busy workshops where greasing is undertaken all day, every day
- 180kg drum not included

\$2,100.00

428263 as above but with dolly \$2,730.00



### G100120 EL SERIES 20KG GREASE KIT

- Effortless greasing
- Heavy duty grease control valve
- 4m long hose assembly
- Affordable and robust
- Maximum fluid pressure of 5,800psi (400bar)
- All types of grease up to NLGI2
- Delivers up to 600g/min
- Tested to up to 24,000kg
- Air consumption of 3.6cfm at 150psi
- Air inlet pressure from 70psi (5bar) to 150psi (10bar)
- Noise level of 82dB

\$960.00



### 7667N ALEMLUBE 20KG GREASE FILLER KIT

- Includes a hand operated medium pressure, high volume grease transfer pump
- Delivers up to 77cc of grease per stroke
- Develops up to 500psi (34 Bar) grease pressure
- Lube system pump reservoir refilling made easy

\$507.00



# SPOTLIGHT ON 55 YEARS OF SERVICE AND INNOVATION

## WORKSHOP & WHS ESSENTIALS

NEW

2  
YEAR  
WARRANTY



### 11028PTA ALEMLUBE 20L OIL DRUM PUMP PUMPTUBE ASSEMBLY

- Designed and engineered with performance, durability and serviceability front of mind
- Drainback nozzle holster ensures that excess oil returns to the drum
- Swivelling control valve eliminates the chance of annoying hose kinks
- Control valve can be locked in the open position as and if required
- Sealed system design eliminates foreign particle contamination
- Also suitable for the transfer of transmission fluids & coolants

\$250.00

NEW

2  
YEAR  
WARRANTY



### YOUR TIME CREATOR & ENERGY SAVER

### 11028 ALEMLUBE BATTERY OPERATED 20L OIL DRUM PUMP

- High impact resistant IK10 rated motor resists operator misuse
- Three point pumptube to motor locking system is robust and durable
- Steel to steel impellar priming system minimises current draw and maximises battery life per charge
- Thermal protection set at 90°C cuts in if the motor is left running and overheats
- Transfers up to 280L per battery charge
- Flow rates of up to 4.6L/min
- Battery run time of up to 65 minutes
- Battery recharge time of 45 minutes
- Carry handle assists with drum changeovers
- Interchangeable motor assembly with 11028PTA
- Battery includes a battery level display
- Covered by a full no exclusions 2 year warranty
- Also suitable for the transfer of transmission fluids & coolants



\$550.00

NEW

18  
MONTH  
WARRANTY



### AAPKA24 ALEMLUBE AUTOMOTIVE PREMIUM MOBILE EVAPORATIVE AIR COOLER

- Suited to warehouses & workshops where traditional cooling methods are impractical or cost prohibitive
- Huge in performance & easy-to-operate producing up to 23,000 cubic metres of airflow per hour
- 240V 650W 3 speed motor
- Fan diameter is 60cm
- Maximum cooling area is 150sqm
- Dimensions are 92.5cm x 58cm x 144cm
- Fully mobile with sturdy lockable front wheels

\$1,320.00

AAPKA30 as above but 1,100W

\$1,760.00

NEW

18  
MONTH  
WARRANTY



### AAPMC85T ALEMLUBE AUTOMOTIVE PREMIUM HEAVY DUTY 8.5T MOBILE WIRELESS COLUMN LIFTS

- Lifting capacity 8.5 tonne per column
- Wireless connection
- Maximum lifting height of 1,700mm
- Each column can be a master or a slave
- Up to 16 columns in a system
- Cable free design, with built-in double batteries
- Easy to move adjustable forks - maximum 550mm, minimum 166mm
- Control panel with LCD colour touch screen
- Built-in hydraulic wheel kit for easy moving



\$11,580.00



Stores advertised on page one of this catalogue are independent businesses. Every effort has been made to ensure that advertised stock is available, but due to factors beyond the control of Alemlube Pty Ltd not all products advertised in this catalogue are available at all stores. Pricing for the products are special prices available through to 30 June 2025. Regular prices vary from store to store. The catalogue pricing is calculated in good faith as the average regular price at the time of preparation. Alemlube Pty Ltd will do everything possible, within reason, to maintain stocks of advertised products but cannot be responsible for unforeseen shortfalls beyond their control.

All products are covered by a 2 year warranty (unless otherwise stated) and with the aid of our sixty five strong nationwide Authorised Agent Network, technical support for all Alemlube products featured in this catalogue will never be far away. E.&O.E. Copyright 2025. Reproduction in whole or part is prohibited without written approval. All prices shown include GST. Freight charges may be applicable and may vary from region to region.